

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B3		REVISED PER ECO-10-014960	21JUL10	HMR	CR


NOTES:

MATERIAL:
 HOUSING: POLYAMIDE 66, UL94V-0, GREEN.
 TERMINAL: PHOSPHOR BRONZE, TIN PLATED.
 CAGE CLAMP: BRASS, NICKEL PLATED.
 SCREWS: STEEL, NICKEL PLATED.

ELECTRICAL:
 CURRENT RATING: 10A
 VOLTAGE RATING: 300V
 INSULATION RESISTANCE: 2000Mohm@500VDC
 INSULATION WITHSTAND: 2000VAC
 WIRE RANGE: 16-26AWG
 SCREW TORQUE: 2.5IN-LB. MAX.

ENVIRONMENTAL:
 OPERATION TEMP.: -40°C TO +105°C

△ TE LOGO LOCATED APPROXIMATE AREA SHOWN.

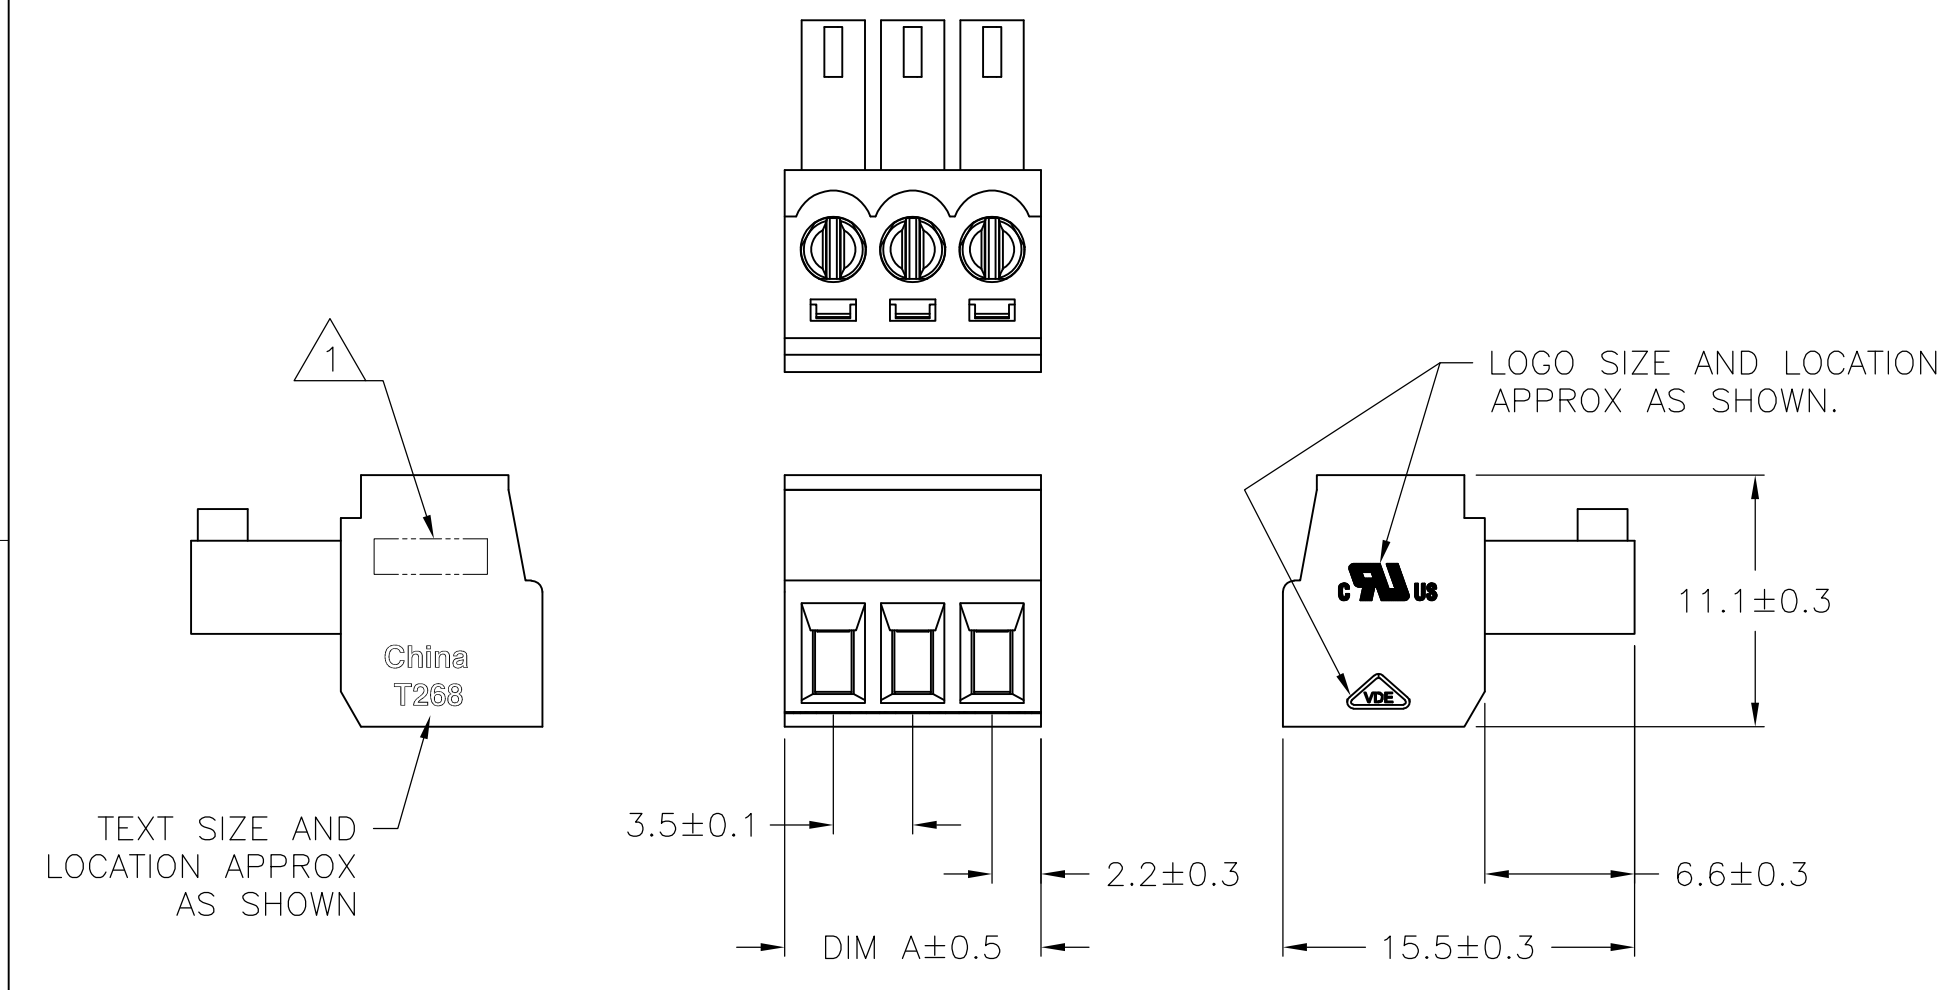

TEXT SIZE AND LOCATION APPROX AS SHOWN

35.80	10	1-1776187-0
32.30	9	1776187-9
28.80	8	1776187-8
25.30	7	1776187-7
21.80	6	1776187-6
18.30	5	1776187-5
14.80	4	1776187-4
11.30	3	1776187-3
7.80	2	1776187-2
DIM A	NO. OF POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 02AUG04	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm		CHK C RICHARD 8/4/04	NAME R/A PLUG, SPECIAL KEYING, 3.5mm TERMINAL BLOCK	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C RICHARD 8/4/04	SIZE A3 CAGE CODE 00779 DRAWING NO C-1776187 RESTRICTED TO -	
0 PLC ± -		PRODUCT SPEC -	SCALE NTS SHEET 1 OF 1 REV B3	
1 PLC ± 0.3		APPLICATION SPEC -		
2 PLC ± 0.25		WEIGHT -		
3 PLC ± -		CUSTOMER DRAWING		
4 PLC ± -				
ANGLES ± -				
MATERIAL -				
FINISH -				