

PART NUMBER	REV	FIRST USED
680802	A	356500-1

TERMINAL NAME: $\Delta$ .250 REV FLAG FASTON™ RECEPT	
63137-1	
TERM APPL SPEC 114-2032	

CRIMPING DATA			
PAD LTR	CRIMP HEIGHT	WIRE SIZE	
A	.063±.002 [1.60±0.05mm]	16	
B	.056±.002 [1.42±0.05mm]	18	
C	.052±.002 [1.32±0.05mm]	20	
D	NOT	USED	
CRIMP	SIZE	TYPE	RANGE
WIRE	.100 [2.54mm]	F	20-16
INSUL	.155 [4.83mm]	F	.079-.118
FEED	APPL INST	SET UP GAGE	LAYOUT
.805	-	-	-
EXPLODED VIEW:A-6085-2			

- 1 RECOMMENDED SPARE PARTS.
- 2 REPLACE EXISTING TERMINATOR BASE PLATE WITH ITEM 78 (TERMINATOR SHUT HEIGHT MUST BE RESET AFTER REPLACEMENT).
- 3 APPLICATOR BENDS TERMINAL 90°.
- 4 SEE DETAIL A FOR ASSY INFORMATION.
- 5 SEE SHEET 2 FOR WIRE DISC INFORMATION.
6. TO INCREASE (DECREASE) REAR BELLMOUTH, ADJUST ITEM 23 DOWNWARD (UPWARD).

-	-	-	-	137
1	-	9-21028-0	PIN, SL SP $\phi$ .12 X .25 LG	136
1	-	21028-6	PIN, SL SP $\phi$ .06 X .50 LG	135
1	-	21030-2	PIN, DOWEL $\phi$ .12 X .50 LG	134
1	-	1-21919-7	PIN, DOWEL $\phi$ .16 X .50 LG	133
1	-	1-21028-4	PIN, SL SP $\phi$ .06 X 1.00 LG	132
2	-	21024-4	WASHER, LOCK #8	131
2	-	5-21028-1	PIN, SL SP $\phi$ .12 X .50 LG	130
2	-	1-21030-5	PIN DOWEL $\phi$ .19 X 1.00 LG	129
6	-	21024-5	WASHER, LOCK #10	128
1	-	3-22183-4	PIN, GROOVED $\phi$ .19 X .50 LG	127
1	-	4-21006-0	SCR, SET 10-32 X .25 LG	126
1	-	2-21000-0	SCR, SHC 6-32 X .50 LG	125
1	-	21009-2	SCR, SET 1/4-20 X .25 LG	124
2	-	21549-8	SCR, SET 6-32 X .25 LG	123
1	-	1-21002-6	SCR, BHC 6-32 X .25 LG	122
2	-	1-21000-9	SCR, SHC 6-32 X .38 LG	121
2	-	1-21002-9	SCR, SHC 6-32 X .38 LG	120
1	-	21909-6	SCR, SHC 1/4-28 X 1.00 LG	119
2	-	2-21000-7	SCR, SHC 8-32 X .50 LG	118
2	-	3-21000-9	SCR, SHC 8-32 X .75 LG	117
2	-	1-21002-8	SCR, BHC 6-32 X .50 LG	116
2	-	1-21002-8	SCR, BHC 6-32 X .50 LG	115
2	-	22733-8	SCR, BHC 8-32 X .38 LG	114
4	-	1-21002-7	SCR, BHC 6-32 X .38 LG	113
2	-	2-21000-0	SCR, SHC 6-32 X .50 LG	112
2	-	1-21000-8	SCR, SHC 6-32 X .25 LG	111
2	-	8-21000-8	SCR, SHC 6-32 X .31 LG	110
2	-	3-21000-6	SCR, SHC 10-32 X .62 LG	109
2	-	3-21000-7	SCR, SHC 10-32 X .75 LG	108
2	-	2-21000-0	SCR, SHC 6-32 X .50 LG	107
1	-	2-21000-8	SCR, SHC 8-32 X .62 LG	106
2	-	2-21000-6	SCR, SHC 8-32 X .38 LG	105
2	-	2-21002-2	SCR, BHC 8-32 X .50 LG	104
2	-	4-21000-1	SCR, SHC 10-32 X 1.50 LG	103
1	-	4-21000-0	SCR, SHC 10-32 X 1.25 LG	102
2	-	3-21002-4	SCR, BHC 1/4-20 X .62 LG	101
-	-	-	-	100


-	-	-	-	90
-	-	-	-	89
-	-	-	-	88
-	-	-	-	87
-	-	-	-	86
2	C	4-354779-0	PIN, WIRE DISC (.3190)C	85
2	C	3-354779-2	PIN, WIRE DISC (.3150)B	84
2	C	1-354779-6	PIN, WIRE DISC (.3070)A	83
-	-	-	-	82
1	-	7-18023-9	SCR, SHC M3 X 30	81
-	-	-	-	80
-	-	-	-	79
1	-	356149-1	PLATE, MODIFIED	78
1	-	454947-1	SCREW, SHLD-BEND CAM	77
1	-	1-22353-7	SCREW, SHLD-DRAG RET	76
1	-	454958-1	PLATE, FEED PIVOT	75
1	-	454926-1	MOUNT, FEED PIVOT	74
1	-	21030-2	PIN, BEND ROLLER	73
2	-	690603-1	SPRING, ASSIST	72
1	-	690701-2	PLATE, ID	71
1	-	22594-8	HEX NUT	70
-	-	-	-	69
1	-	240626-1	SHAFT PIVOT	68
1	-	240633-1	BUSHING	67
1	-	690537-1	LEVER-INTERMEDIATE	66
1	-	690538-1	BLOCK-PIVOT	65
1	-	240632-3	SCREW ADJ.	64
1	-	240659-3	PIN-CAM ROLLER	63
1	-	240658-1	ROLLER-CAM	62
1	-	454398-2	ROD-FEED	61
1	-	453615-1	PLATE, ID	60
1	-	454933-1	CAP	59
1	-	454935-2	HOUSING	58
1	-	454925-1	MOUNT, FEED PAWL	57
1	-	454924-1	FEED PAWL	56
1	-	5-21028-2	FEED FINGER PIN - SPRING PIN	55
1	-	691499-1	FEED FINGER SPRING	54
1	-	454951-1	FEED SLIDE	53
1	-	454962-1	ARM, FEED	52

-1	LEADMAKER	MECH POST FEED	
1	-	454960-1	BLOCK, FEED SLIDE 51
1	-	454961-1	PLATE, FEED SLIDE COVER 50
1	-	7-21002-8	CRIMPER BOLT 49
1	-	238015-1	CAM, POST FEED 1 5/8 ST 48
1	-	22353-8	SCREW-SHOULDER 47
1	-	690402-1	BLOCK-INSULATION ADJ. 46
1	-	690191-1	PLUG-NYLON 45
1	-	454963-1	RAM 44
1	-	690125-1	WASHER-LAMINATED 43
1	-	690124-1	WASHER RAM 42
-	-	-	- 41
2	-	23241-6	BALL STEEL 40
2	-	690170-1	SPRING-COMPRESSION 39
1	-	690142-1	DISC-INSULATION 38
1	-	354777-1	DISC-WIRE 37
1	-	22480-5	SPRING WASHER 36
1	-	690212-1	POST-RAM 35
1	-	691353-1	WIRE STOP 34
1	-	454945-1	BASE PLATE 33
1	-	454955-1	PLATE, DRAG SLIDE 32
1	-	454923-1	MOUNT, DRAG SPRING 31
1	-	454956-1	PLATE, DRAG 30
1	-	1-22353-0	SHOULDER SCREW, DRAG 29
2	-	1-22353-3	SHOULDER SCREW, DRAG SPRINGS 28
2	-	2-22282-8	DRAG SPRING 27
1	-	240793-1	DRAG RELEASE LEVER 26
1	-	454957-1	DRAG-SHOE 25
1	-	454927-1	REAR STRIP GUIDE 24
1	-	454928-1	FRONT STRIP GUIDE 23
1	-	454921-1	ANCHOR-SPRING 22
1	-	3-22288-0	SPRING-FEED RETURN 21
-	-	-	- 20
1	-	694882-1	STRIPPER 19
1	-	454922-1	TERMINAL HOLDER 18
1	-	250098-1	BEND, ROLLER 17
1	-	22498-4	BEARING, BALL 16
1	-	454932-1	CAM, BEND 15
1	-	454954-1	CLEVIS, BEND ROLLER 14
1	-	454949-1	SPACER, BEARING 13
1	-	5-22280-9	SPRING, SHEAR 12
1	-	454950-1	SHEAR STOP 11
1	-	691896-1	ROLLER, SHEAR 10
1	-	454959-1	FLOAT-SHEAR-FRONT 9
1	-	454948-4	ANVIL 8
1	-	454952-1	GIB, GUIDE 7
1	-	454946-1	SHEAR DEPRESSOR 6
1	-	454953-1	GIB, SHEAR 5
1	-	238009-4	CRIMPER SPAC. BLOCK 4
1	-	6-690403-7	INSULATION CRIMPER 3
1	-	690407-6	CRIMPER SPACER 2
1	-	1-453805-3	WIRE CRIMPER 1

QTY	DWG SIZE	PART NO	DESCRIPTION	ITEM NO
← REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)				
PARTS LIST				

QTY	DWG SIZE	PART NO	DESCRIPTION	ITEM NO
← REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)				
PARTS LIST				

QTY	DWG SIZE	PART NO	DESCRIPTION	ITEM NO
← REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)				
PARTS LIST				

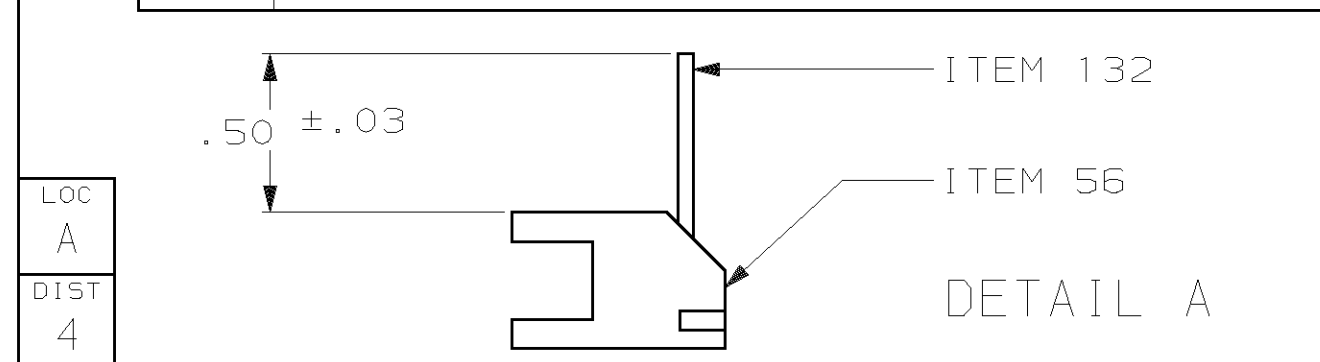

DIMENSIONS IN INCHES. DO NOT SCALE PRINT. TOLERANCES UNLESS OTHERWISE SPECIFIED:			
2	PLC	DEC	±
3	PLC	DEC	±
4	PLC	DEC	±
ANGLES ±			
SURF TEXTURE: ✓			
REMOVE BURRS, BREAK SHARP EDGES R.015 MAX			
P	F	LTR	REVISION RECORD
	A		REVISED
		WH	4-99
		APP	DATE

MATL	-	HT TR	-	FIN	-
DR	3-30-99	APP	3-30-99		
W.HOOVER		T. ELBIN			
CHK	3-30-99	REL	-		
C. ERISMAN					
NAME SIDE FEED MINI-APPLICATOR			MACHINE REF MINI-APPL		
SCALE	-	DWG NO	680802	SHEET	1 OF 2
				REV	A

THIS DRAWING IS A CONTROLLED DOCUMENT.

07MAY, 1999

RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED. COPYRIGHT 1999

680802

D

C

B


A

PART NUMBER	REV	FIRST USED
680802	A	356500-1

-1 LEADMAKER MECH POST FEED

THIS DRAWING IS A CONTROLLED DOCUMENT.

680802

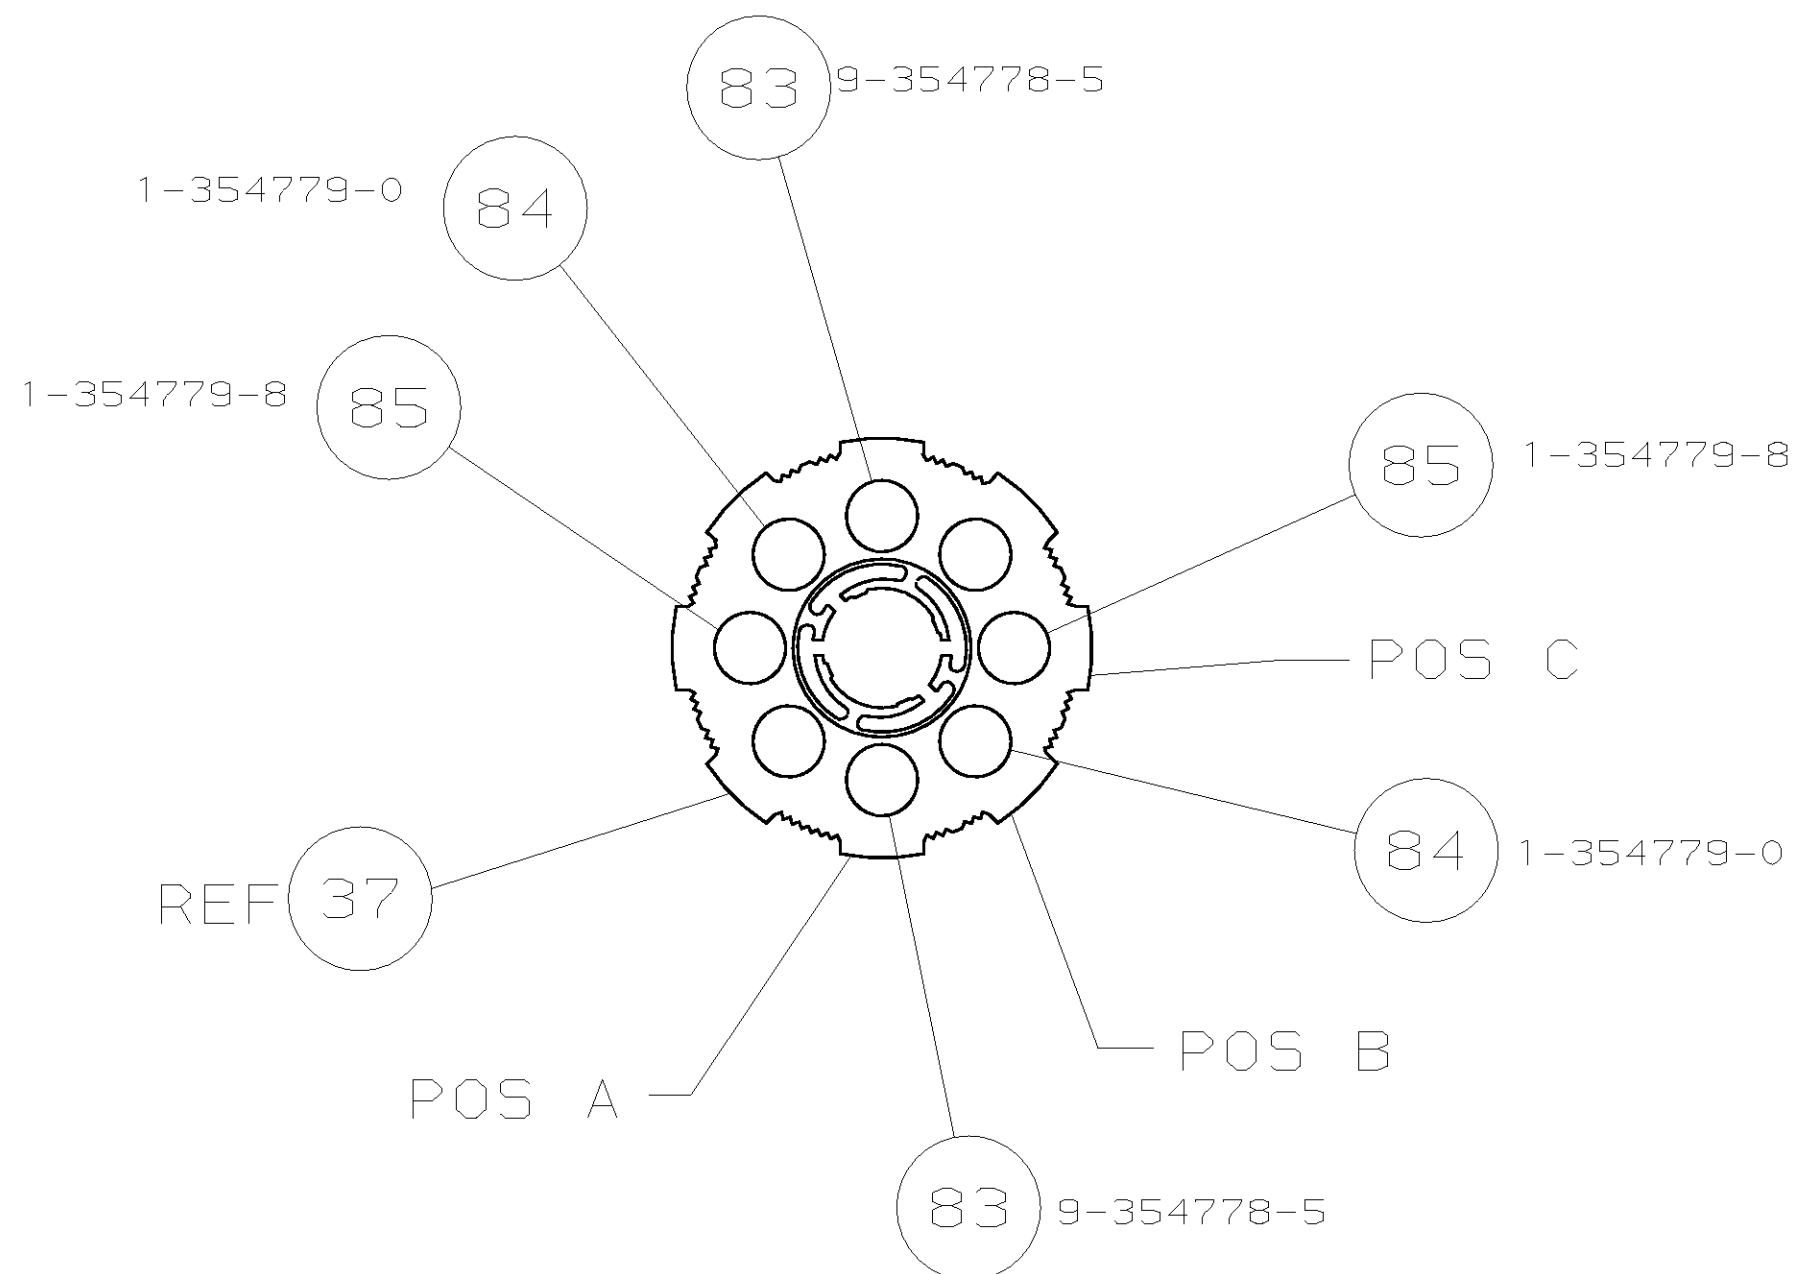

RELEASED FOR PUBLICATION 07 MAY, 1999  
 BY AMP INCORPORATED. ALL RIGHTS RESERVED.  
 COPYRIGHT 1999  
 LOC A  
 DIST 4

QTY	DWG SIZE	PART NO	DESCRIPTION	ITEM NO	QTY	DWG SIZE	PART NO	DESCRIPTION	ITEM NO
← REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)					← REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)				
PARTS LIST					PARTS LIST				
			DIMENSIONS IN INCHES. DO NOT SCALE PRINT. TOLERANCES UNLESS OTHERWISE SPECIFIED: 2 PLC DEC ±- 3 PLC DEC ±- 4 PLC DEC ±- ANGLES ±- SURF TEXTURE: ✓ REMOVE BURRS, BREAK SHARP EDGES R.015 MAX		MATL		HT TR		FIN
					DR	3-30-99 W. HOOVER	APP	3-30-99 T. ELBIN	
					CHK	3-30-99 C. ERISMAN	REL	-	
					NAME SIDE FEED MINI-APPLICATOR			MACHINE REF MINI-APPL	
					SCALE		DWG NO	680802	SHEET 2 OF 2 REV A
					CAGE CODE 00779 CUSTOMER AND ASSEMBLY DRAWING				RESTRICTED TO